

MERCURY-FLEX

Mercury 2U modules with HOT-SWAP shelf



The Mercury-Flex is the ideal power solution for high value, mission critical applications in the semiconductor, industrial, and military markets. Providing fully adjustable, wide-range DC output, while operating from universal AC input, the Mercury Flex is perfectly suited for embedded process applications which require dynamic power control.

With a high speed CAN-Bus interface providing full control of output voltage, current, and power, along with real-time read back of unit operating input voltage, temperature, alarm status, and output voltage and current, the Mercury Flex provides optimal integrations and optimization opportunities for complex systems.

The Mercury Flex provides up to 3.8kW per power supply module, and can be connected in parallel to service higher power applications.

BENEFITS

Reduced System Complexity and Time to Market

Wide range of models and fully adjustable outputs. Multiple control modes provide ultimate application flexibility.

High Reliability for Critical Applications

Astrodyne TDI's comprehensive reliability assurance processes, including design to the rigorous requirements of NAVSO P3641A, HALT, DFMEA and our unique Highly Accelerated Stress Screening (HASS) on 100% of production units, assure the ultimate in unit reliability and performance.

High Power Density

Up to 15.2kW power in a 2U high, 19" rack space.

FEATURES

Universal AC Input

90VAC – 264VAC with full power factor control

Wide Range Outputs

28V (3V-28V)

56V (5V-56V)

125V (10V-125V)

250V (15V-450V)

450V (10V-250V)

Up to 3.8KW power per module

Up to 160A current per module (28V model)

Constant voltage, current, or power operating modes

Efficiency up to 93%

Isolated Auxiliary Output: 12VDC @ .1A

Digital Remote Control

CAN Bus 2.0B provides extensive command and reporting features (Browser based interface available)

Parallel and Redundant Operation

Automatic current sharing, output fault isolation device and hot-swap compatible

Input Voltage Transient Immunity

SEMI 47 Compliant including 20ms holdup time EN61000-4-4 and -5, severity level 4

High MTBF

>1M hours

Variable Speed Fan Control

Minimizes audible noise and maximizes fan life

Astrodyne TDI
Now you have power.

www.AstrodyneTDI.com | +1 908-850-5088

© Copyright 2018, Astrodyne, Inc

This document is believed to be correct at time of publication and Astro- dyne, Inc accepts no responsibility for consequences from printing errors or inaccuracies. Specifications are subject to change without notice.

MERCURY-FLEX

Mercury 2U modules with HOT-SWAP shelf

MODEL NUMBER	PART NUMBER	DESCRIPTION
MER38WRB-F028D00-LF	T100106170-F028D00LF	RECTIFIER, 3.8KW 2U 0-28V 160A DROOP ROHS
MER38WRB-F056D00-LF	T100106170-F056D00LF	RECTIFIER, 3.8KW 2U 0-56V 70A DROOP ROHS
MER38WRB-F125D00-LF	T100106170-F125D00LF	RECTIFIER, 3.8KW 2U 0-125V 34.5A DROOP ROHS
MER38WRB-F250D00-LF	T100106170-F250D00LF	RECTIFIER, 3.8KW 2U 0-250V 17.5A DROOP ROHS
MER38WRB-F450D00-LF	T100106170-F450D00LF	RECTIFIER, 3.8KW 2U 0-450VDC 10.2A DROOP ROHS


PARAMETER	MERCURY-FLEX
Input AC	90 - 176 or 176-260VAC auto range
AC Frequency	47-63Hz
Max Input Current	27A RMS, 50A Peak Inrush
Power Factor	>0.97 Typical
Outputs, DC	Main Output: (Five standard models) 28V (3V-28V), 56V (5V-56V), 125V (10V-125V), 250V (10V-250V), 450V (15V-450V)
Output Power	3,800W Max (Vin 176VAC-264VAC)
Efficiency	91% to 93% (depends on Vout model)
Ripple/Noise	<1% p-p of Vout max
Load Regulation	2% of Vout max, from no load to full load (Current share V-Droop)
Electronic Alarms	AC OK, Output OK, Inhibit, Protect Status
Visual Indicators	Front Panel LED (OK/Fault)
Digital Command / Status	CAN-Bus 2.0B
Protection Features	Input UV, Input OV(MOV), Input OI(fuse), Output OV, Output CL, OverTemp
Operating Temperature	-30 to +55°C (full rated)
Storage/Transportation	-40 to +85°C
Humidity	0% to 95%RH, non condensing
Isolation	In to Out: 3000 VAC RMS In to GND: 1500 VACRMS Out to GND: Up to 1500 VACRMS
Regulatory/Safety C = Conducted includes shelf or supply	CE: Low voltage directive Safety: IEC/UL 60950-1; EN60950-1: 2005 (Second Edition) + Am 1:2009 + Am 2:2013 EMI (C): FCC Part 15, Sub Part J, Class A EN55022, class AEMI\
EMC	EN 61000-3-2 EMC EN 61000-6-1 (Immunity, light industry)EN 61000-6-2 (Immunity, industry) EN 61000-6-3 (Emissions, light industry)EN 61000-6-4 (Emissions, industry)
Dimensions (inches)	Module: 4.25 x 3.42 x 15.15" Shelf : 18.19 x 3.46 x 16.5"
AC Line Sag/Interruption	SEMI F47-0706
Cooling	Internal Variable Speed Fan, front airinput
Warranty	2 Years





MERCURY-FLEX

Mercury 2U modules with HOT-SWAP shelf

MERCURY FLEX 2U RECTIFIER

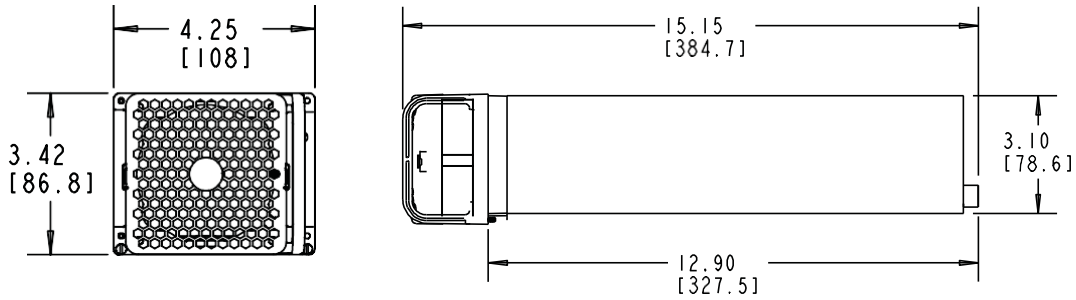

2U SHELF ASSEMBLY

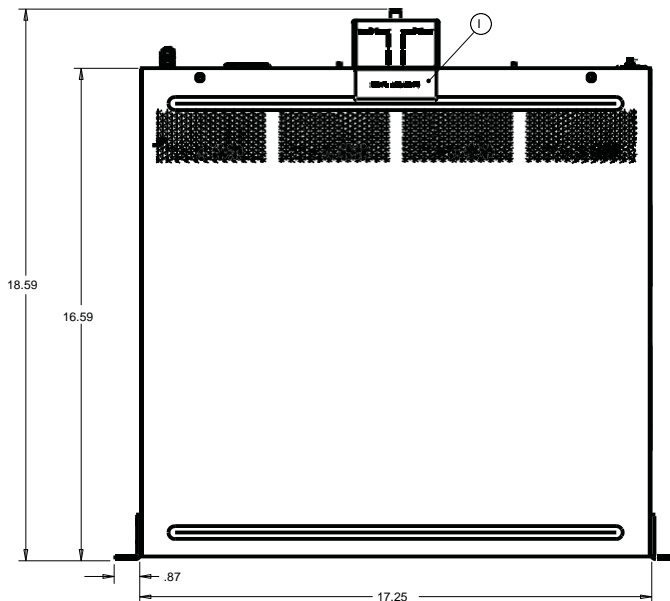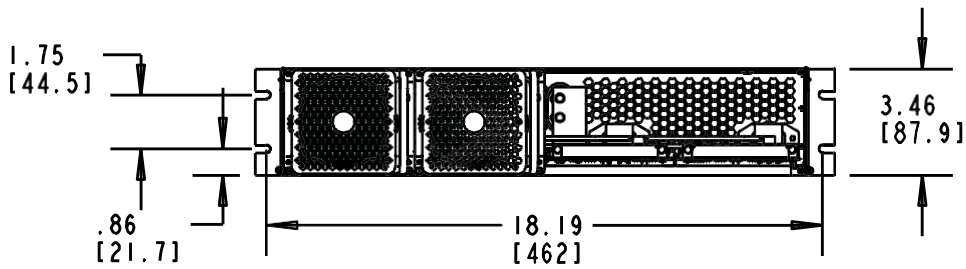

Notes: Shelf capacity = four Mercury-Flex rectifiers, two shown installed. Inches (mm)